MetalWorks Open Cell



Benefits

- Creates a modern, open look for a space
- Helps mask the plenum
- 100% accessible to plenum space
- Lay In panel installs easily on standard Suprafine 15mm Grid
- Range of two standard panel sizes and four designs

Application Areas


- Specialty Shops
- Supermarkets
- Shopping Malls
- Food Courts
- Transport Facilities
- Showrooms
- Office Reception Areas
- Foyers and Lift Lobbies





Global White




Powdercoat colours available

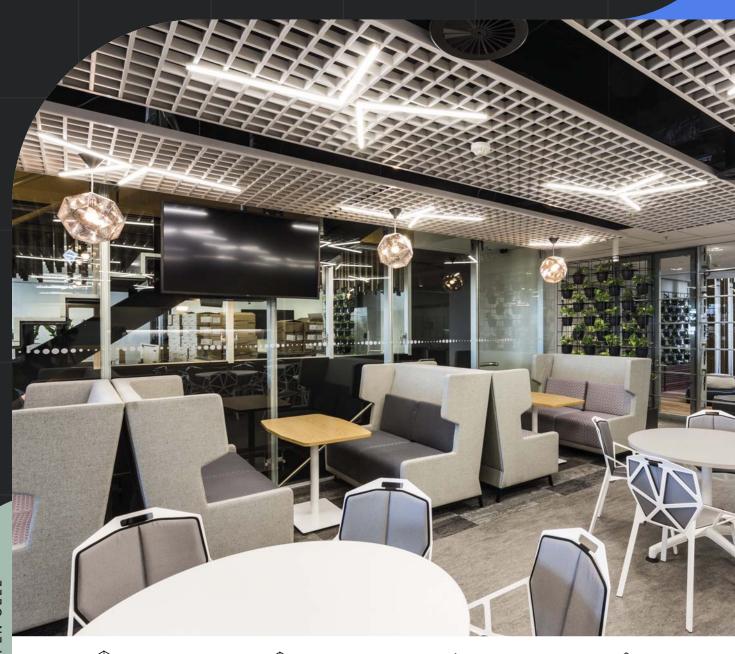







75mm x 75mm Cells



100mm x 100mm Cells



150mm x 150mm Cells



200mm x 200mm Cells

MetalWorks Open Cell

Panel Details	Cell Size 75 x 75mm	Cell Size 100 x 100mm	Cell Size 150 x 150mm	Cell Size 200 x 200mm
Open Area	66%	73%	82%	86%
Panel Height	38mm	38mm	38mm	38mm
Design / Finish: Powdercoating in Armstrong Global White				
600 x 600mm	9002M	9004M	9006M	9007M
1200 x 600mm	9012M	9014M	9016M	9017M
Infill Panels	BP6106	BP6107	BP6108	BP6109

Notes: Other sizes available upon request. Contact your local Armstrong Ceilings representative for stock availability



RH99% at 0°C - 49°C



Conforms with NCC Spec. C1.10 as tested to AS 5637.1:2015 – Group 1, and ISO 5660 – Group 1 – S

Material


Open Cell Panels: Aluminium Infill (Service) Panels: Aluminium

Surface Finish

Factory applied polyester powdercoat Colours: Standard in Global White RAL colours available upon request Recommended Suspension System MetalWorks Open Cell Ceilings comprise of Lay In panels installed on PeakForm Suprafine 15mm Flat Faced Tee Grid complete with SCDGS suspension clip and Item BPCS300 looped wire as per Installation Instructioins. Refer to MetalWorks Open Cell installation guide.



Panel only up to 2 kg/m²

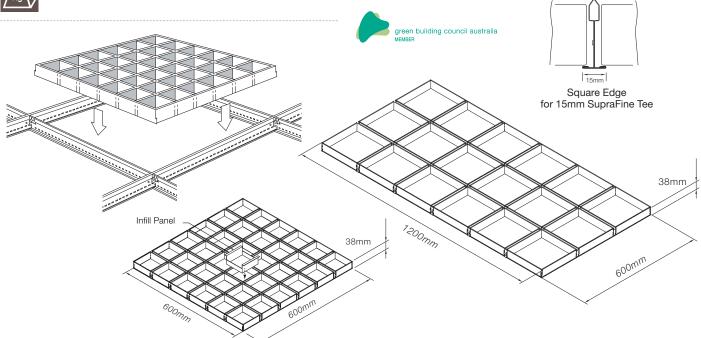

Contact us

Armstrong Ceiling Solutions (Australia) Pty. Ltd.

NSW / ACT (02) 9748 1588 VIC / TAS (03) 8706 4000 QLD / NT (07) 3809 5565



info@armstrongceilings.com.au www.armstrongceilings.com.au