

## Benefits

- Provides perfect total acoustical balance, ideal for working and learning environments
- TOTAL ACOUSTICS™ Performance (NRC+CAC)
  - Excellent sound attenuation, improving room to room privacy
  - High sound absorption for reduced reverberation and quieter spaces
- Sustainable Contribution
  - Global GreenTag<sup>CERT</sup>™ GreenRate™ Level A Certified for Green Star™
- Durable, reinforced, scratch resistant face
- New smooth finish with high light reflective finish for a brighter space
- Complete range of edge details
- Humiguard™ Plus RH99 Sag Resistance
- ISO 3 Clean Room Performance

## Application Areas

- Meeting rooms
- Conference rooms
- Corridors
- Classrooms
- Healthcare
- Department Stores
- Shops



# Ultima™



RH99 Humidity Resistant



Scratch Resistant



Product Handling Durability



Cleanable



ISO 4 Clean Room ISO 14644-1



Anti mould and mildew



Very Low Emissions



Recycled Content EN ISO 14021



Light Reflectance



Acoustical Comfort

Panel Options	BOARD	TEGULAR 24	TEGULAR 15/90	K2C2 EDGE
	Prelude™ 24mm Grid	Prelude 24mm Grid	Suprafine™ 15mm Grid	Silhouette™ 15mm Grid
600 x 600 x 19mm	1001G	1003G	1005G	-
1200 x 600 x 19mm	1002G	1004G	1006G	**
1200 x 300 x 19mm	**	1012G	1013G	**
1200 x 400 x 19mm	1035G	1037G	1015G	1027G*
1350 x 450 x 19mm	1036G	1038G	1016G	1032G*
1500 x 500 x 19mm	1011G	1039G	**	1033G*

- Not available

\* Item number for K2C2 Edge Panel for Top Hat Modular Grid

\*\* Special items and other sizes available upon request

• Contact your local Armstrong Ceilings representative for stock availability




EN ISO 354 & EN ISO 11654

NRC	125	250	500	1000	2000	4000	Hz
0.70	0.30	0.35	0.65	0.95	0.95	1.00	$\alpha_p$



EN ISO 10848-2 & EN ISO 717-1

CAC
40 dB

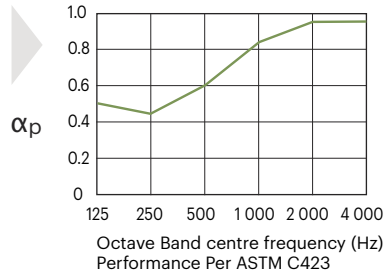

TOTAL ACOUSTICS

• NRC = 0.70



Humiguard™ Plus Sag Resistance (RH99% at 0°C – 49°C)  
Refer to website for additional information



Conforms with NCC Spec. C1.10 as tested to AS 5637.1:2015 – Group 1, and ISO 5660 – Group 1 – S



Thermal Insulation (R- Value)  
0.35 m<sup>2</sup>K/W



5 kg/m<sup>2</sup>

#### Material

Wet-formed mineral fibre with durable acoustically transparent membrane

#### Surface Finish

Factory applied acrylic paint

#### Backloading Recommendation

Contact your local Armstrong Ceilings representative

#### Suspension Systems

PeakForm™ Steel options above, with ARMSTRONG BLUE TONGUE™ Aluminium upon request

#### Green Star™: Potential contribution Interiors v1.3 / Design & As Built v1.3

Indoor Environmental Quality				Materials	
Credit 9/10 ACOUSTIC COMFORT	Credit 10.2A/11.2A LIGHTING COMFORT SURFACE ILLUMINANCE	Credit 11.1B/12.1B VISUAL COMFORT: DAYLIGHT	Credit 12/13 INDOOR POLLUTANTS	Credit 21C-D/21C-D SUSTAINABLE PRODUCTS – “Level A” Third Party Certification Environmental Product Declarations	Credit 22/22 CONSTRUCTION AND DEMOLITION WASTE
✓	✓	✓	✓	✓	✓



## Contact us

Armstrong Ceiling Solutions (Australia) Pty. Ltd.

NSW / ACT  
(02) 9748 1588

VIC / TAS  
(03) 8706 4000

QLD / NT  
(07) 3809 5565



info@armstrongceilings.com.au

www.armstrongceilings.com.au