



BLUE TONGUE™ ALUMINIUM GRID

Inspiring Great Spaces™

Armstrong[®]
CEILING SOLUTIONS

A modern office lounge with a modular ceiling system, dark leather chairs, and a wooden reception desk. The ceiling features a grid of square acoustic panels with recessed lighting. The room has a contemporary design with dark wood paneling, a large potted plant, and a concrete pillar.

SUSPENSION SYSTEMS CONTENT

Modular Ceiling Systems — Pages 4 – 5

One Way Ceiling Systems — Pages 6 – 7

Two Way Ceiling Systems — Page 8

Axiom Perimeter Solutions — Page 9

Axiom Pelmet Systems — Pages 10 – 11

BLUE TONGUE™ ALUMINIUM GRID

Armstrong® Blue Tongue™ Aluminium Grid Systems

Extruded aluminium grid systems are the natural complement to Armstrong acoustic ceiling panels in A-Grade commercial applications.

Armstrong Ceilings delivers more than 30 years of expertise in ceiling grid solutions to the Australian and New Zealand markets.

We offer a complete range of Modular, One Way and Two Way Systems, for both Mineral Fibre and Metal ceiling panels.

Key Features

- Full and rapid demountability and re-use of components
- Complete range of interlocking accessories
- Choice of module sizes, including 1200x1200, 1350x1350 and 1500x1500
- Engineered and tested system
- Complete integration with Perimeter/Pelmet Systems

Technical Features

- Produced from proven 6063 T5 grade extruded aluminium
- Polyester Powdercoat
- Compliant to AS/NZS2785:2000 – Suspended Ceiling Code

Axiom Perimeter Solutions

Armstrong Ceilings provides a comprehensive range of Axiom Perimeter Solutions, including: wall angles, transitions trims and pelmets.


Custom Ceiling Solutions

Armstrong Ceilings has the capacity of developing custom solutions to suit most commercial requirements.

For
Seismic Design
support please
contact your local
Armstrong Ceilings
office.



Clean mitred cross runner intersection.

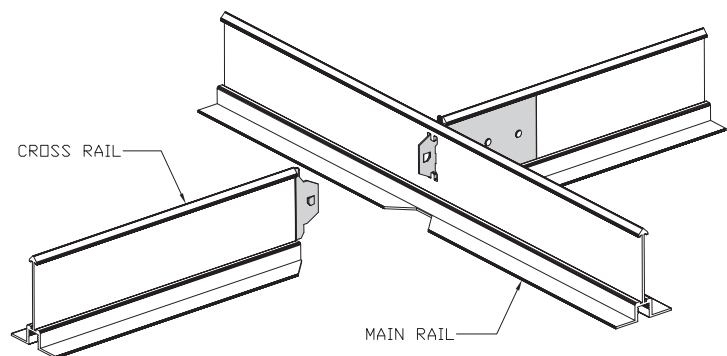


Armstrong® Blue Tongue™ positive lock connection.












3-sided Pelmet with Air Diffuser Face Plate

MODULAR CEILING SYSTEMS





Component Specifications




Item	Description	Dimensions (mm)			
		Slot Spacing	Length	Height	Width
Module 1200x1200mm					
ALMRTH3600	Top Hat Main Bar	1200	3600	45	32
ALCRTH1200	Top Hat Cross Runner	—	1200	45	32
BP743054CA	C-Spline (For Mineral Fibre only)	—	1188	35	10
Module 1350x1350mm					
ALMRTH4050	Top Hat Main Bar	1350	4050	45	32
ALCRTH1350	Top Hat Cross Runner	—	1350	45	32
BP743354CA	C-Spline (For Mineral Fibre only)	—	1338	35	10
Module 1500x1500mm					
ALMRTH4500	Top Hat Main Bar	1500	4500	50	32
ALCRTH1500	Top Hat Cross Runner	—	1500	50	32
BP743654CA	C-Spline (For Mineral Fibre only)	—	1488	35	10

MODULAR CEILING SYSTEMS

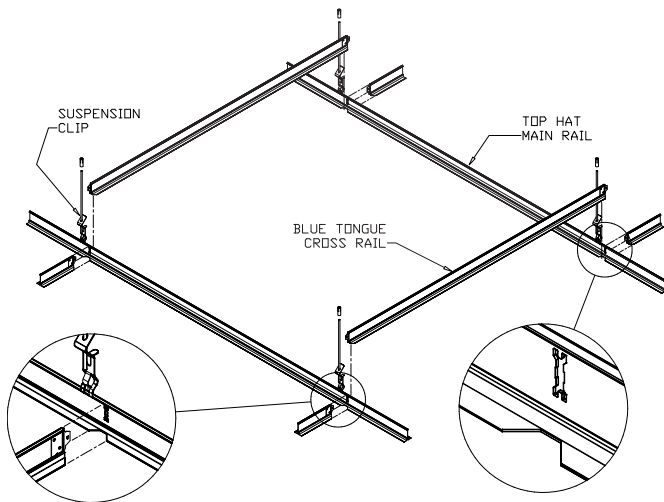



The High tensile "Blue Tongue" staked on clip – provides positive lock connection with ease of installation and demountability.

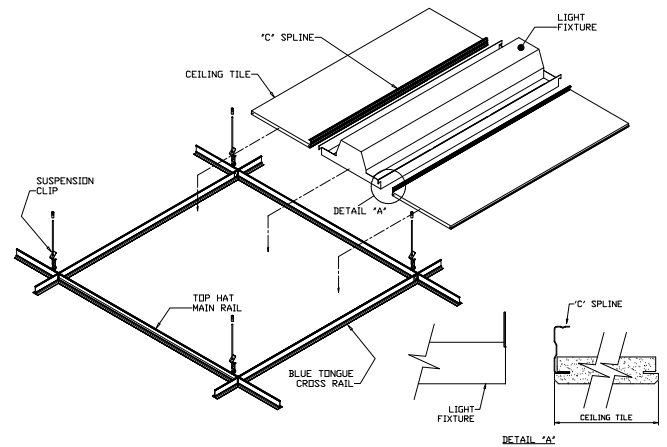

Completed grid system with panels / lights to be installed.

Note: When light fixtures are rotated 90 degrees, an additional suspension hanger is required at the mid point of each cross runner in the module.
C-Splines are used only with mineral fibre panels.

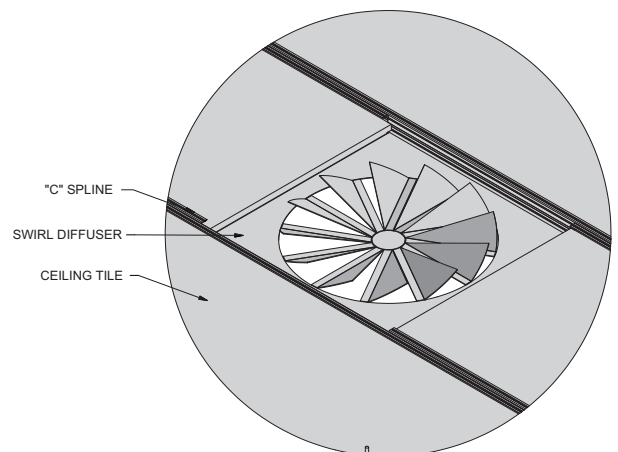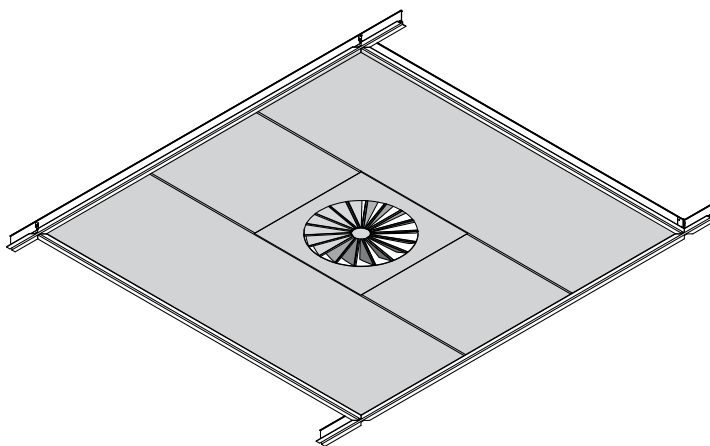


Simple integration of light fixtures and swirl diffusers

KEY FEATURES

- Simplicity of square module, enabling panels and light fixtures to be rotated by 90°
- Robust extruded aluminium "top hat" profile for both primary and secondary sections
- Clean, flush fitting, mitred grid intersections
- Full and rapid demountability and re-use of components
- Complete range of interlocking accessories
- Choice of module size, including 1200x1200, 1350x1350 and 1500x1500
- Custom sizes available
- Simple panel removal and plenum access
- Mechanical services integration, including support tray options. Contact your Armstrong Ceilings office for further details.




Additional information and detailed drawings on the Blue Tongue Modular System can be found at www.armstrongceilings.com.au

ONE WAY CEILING SYSTEMS




One Way System for Mineral Fibre Panels

Component Specifications





Item	Description	Dimensions (mm)			
		Routs	Length	Height	Face Width
ALOWHTH100	Top Hat Main Bar – 1200	300cc.	3600	50	32
ALOWHTH150	Top Hat Main Bar – 1350	450cc.	3600	50	32
ALOWHTH200	Top Hat Main Bar – 1500	500cc.	3600	50	32
ALOWFF100	Flat Facet Main Bar – 1200	300cc.	3600	45	32
ALOWFF150	Flat Facet Main Bar – 1350	450cc.	3600	45	32
ALOWFF200	Flat Facet Main Bar – 1500	500cc.	3600	45	32
BP743054CT	Locking "C" Splines – 1200	–	1200	35	–
BP743354CT	Locking "C" Splines – 1350	–	1350	35	–
BP743654CT	Locking "C" Splines – 1500	–	1500	35	–
BP743054CA	"C" Splines	–	1188	25	–
BP743354CA	"C" Splines	–	1338	25	–
BP743654CA	"C" Splines	–	1488	25	–

Note: Details on Perimeters, Wall Angles and Accessories – refer page 9

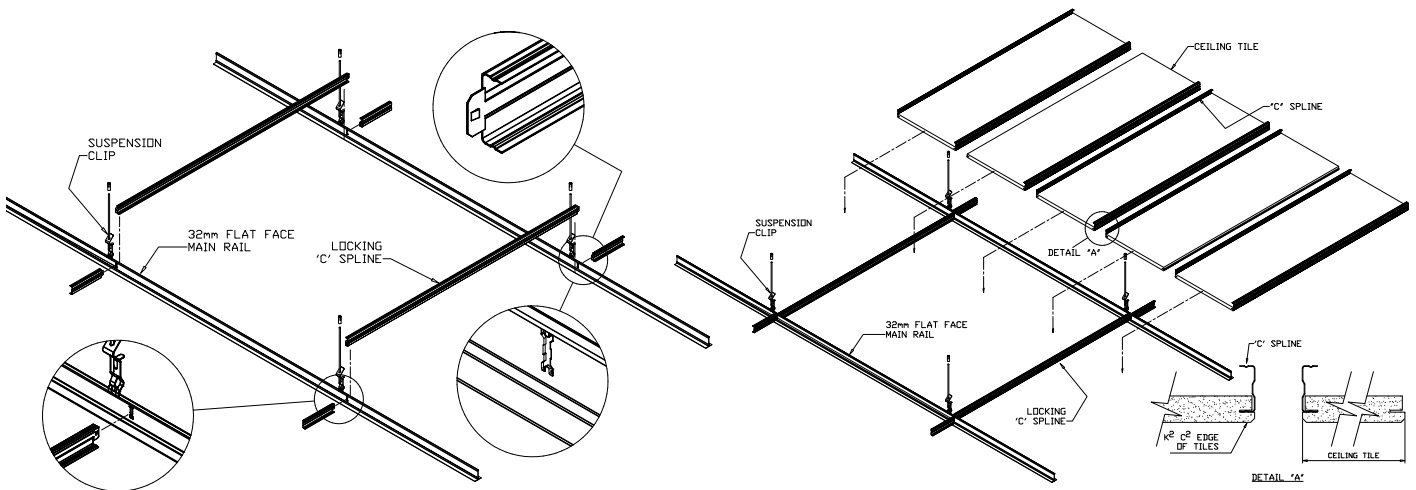


Additional information and detailed drawings on the Blue Tongue One Way System can be found at www.armstrongceilings.com.au

ONE WAY CEILING SYSTEMS

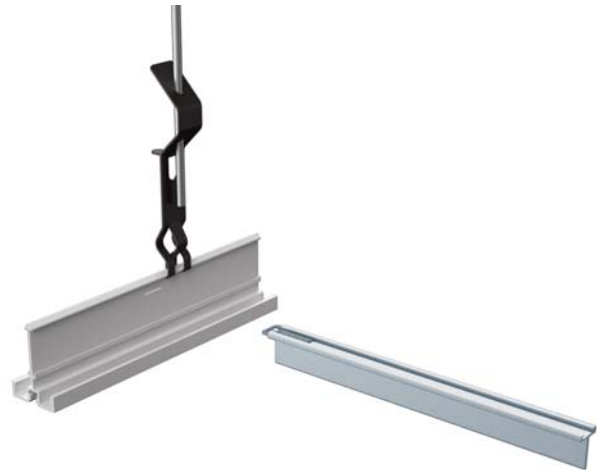

One Way Hook On System for MetalWorks Panels

Component Specifications






Item	Description	Dimensions (mm)			
		Slot Spacing	Length	Height	Width
ALOWHTHMR	Top Hat Main Bar	300	3600	50	35
ALSPLINEOWH1200	Locking Spline	–	1200	21	15
ALSPLINEOWH1350	Locking Spline	–	1350	21	15
ALSPLINEOWH1500	Locking Spline	–	1500	21	15


Note: Details on Perimeters, Wall Angles and Accessories – refer page 9

KEY FEATURES


- Up-market visual
- Minimum Exposed Grid
- Simple removal of panels / Full accessibility
- Locking Splines ensures:
 1. Rigidity – minimising creep or racking
 2. Reduces requirement for bracing
 3. Precise panel alignment
- Mechanical services integration, including support tray options

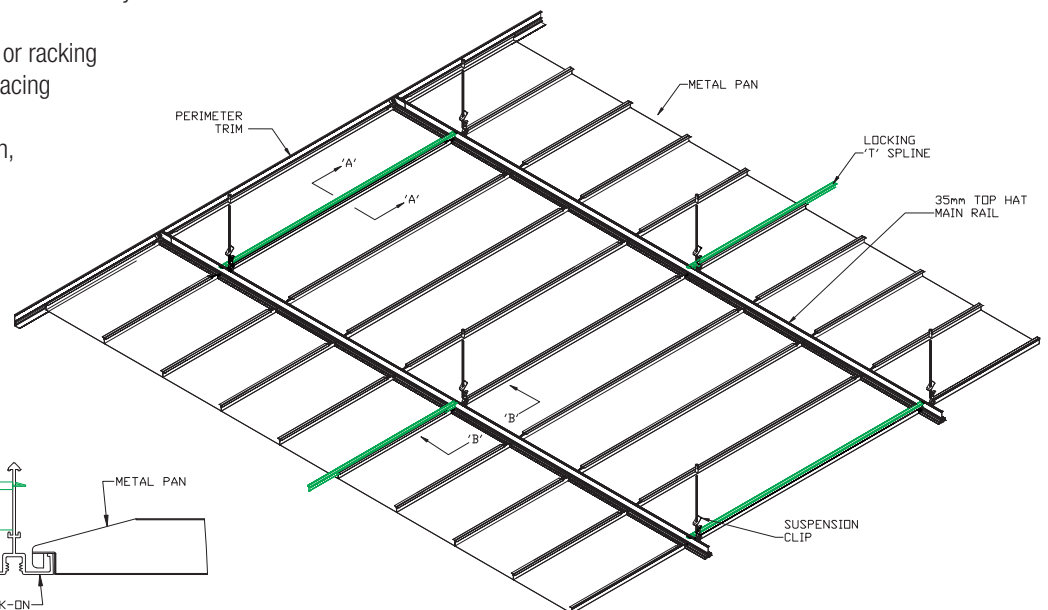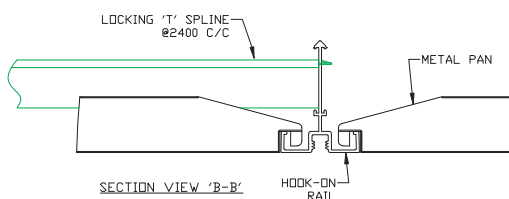

TWO WAY CEILING SYSTEMS




NSW Police Ctr – Parramatta NSW

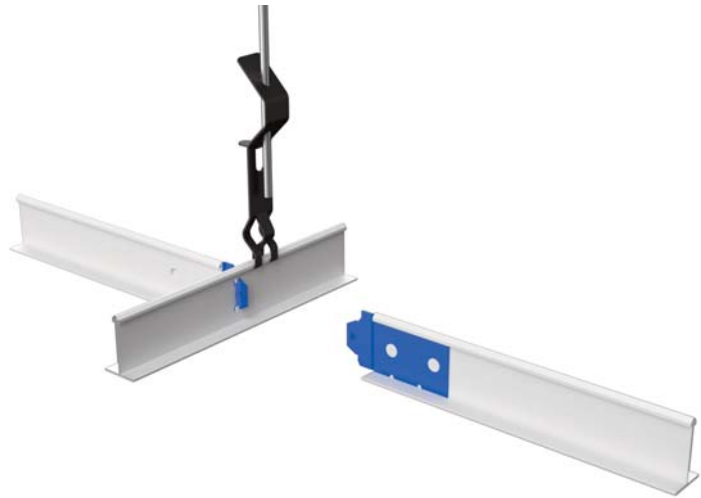

Two Way Exposed

Component Specifications



Item	Description	Dimensions (mm)			
		Slot Spacing	Length	Height	Width
BP4640037S37	Flat Faced 24mm Main Bar (Connection via M/R Joiner, item BP9338)	300	3600	38	24
BP4630037S38	Flat Faced 24mm Cross Runner	600	1200	38	24
BP4620037S30	Flat Faced 24mm Cross Runner Blue Tongue Connection – flush with Main Bar	–	600	38	24

Notes:

Other Flat Faced Tee profiles are available for custom modules
Details on Perimeters, Wall Angles and Accessories – refer page 9

System Drawing and Installation


(Typical modules are 1200 x 600mm and 600 x 600mm).



Standard lay-in installation of Blue Tongue Aluminium 24mm Grid with Square or Tegular edge panels.

KEY FEATURES

- Practical and simple
- Full accessibility to plenum
- Simple removal of panels
- Best ceiling longevity with lowest maintenance costs






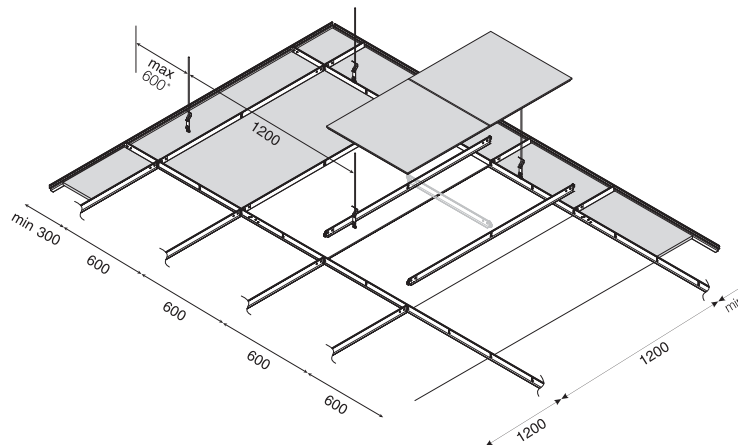


Additional information and detailed drawings on the Blue Tongue Two Way System can be found at www.armstrongceilings.com.au

AXIOM PERIMETER SOLUTIONS AND ACCESSORIES


Perimeter / Transition Trims / Wall Angles

Suitable for all Systems





Item:	ALPT4500LL	ALPTQLFF45	ALBULK3600SW	ALPTPERFTH3600	ALPTFF	ALPT3600PB
Description	Top Hat with 70mm Upturn	Flat Face	Bulk Head Trim	Perforated Top Hat	Flat Face with Horizontal Leg for 13 PB	Top Hat with Horizontal Leg for 13 PB
Dimensions (mm) (l) x (h) x (w)	4500 x 70 x 41	3600 x 45 x 24	3600 x 38 x 28	3600 x 38 x 45.5	3600 x 45 x 32	3600 x 45 x 32

Only suitable for Modular Ceiling Systems









Item:	ALMRTH3600OS	ALMRTH4050OS	ALMRTH4500OS
Description	Top Hat Punched one side @ 1200cc.	Top Hat Punched one side @ 1350cc.	Top Hat Punched one side @ 1500cc.
Dimensions (mm) (l) x (h) x (w)	3600 x 45 x 32	4050 x 45 x 32	4500 x 50 x 32

Suitable for all Systems







Item:	AL009RCPSW	AL008RCPSW
Description	Shadow line Suits roll in clip ALRIC	Std "L" Suits roll in clip ALRIC
Dimensions (mm)	3600 x 29 x 29	3600 x 24 x 20

Perimeter Trims / Accessories for One Way MetalWorks Hook On System



Item:	ALPTONEWAYSW	ALPTHO	ARM-037	ARM-035	ARM-034	ARM-033
Description / Application	Perimeter Trim	Top Hat Hook On Plasterboard Perimeter	Perimeter Trim Joiner Grub screw fastening	Main Runner Joiner To suit ALOWTHMR	Roll In Clip Connects Main Runner to Perimeter Trim	Roll In Clip Connects Locking Spline to Perimeter Trim
Dimensions (mm)	3600 x 50 x 25	3600 x 50 x 35				

Accessories for Modular, One Way (for Mineral Fibre) and Two Way Systems



Item No.	ALRIC	ALMRJL*	ALMRJL90	ALRICL	ALSDL / ALSDS	ALSCLH
Description	Roll In Clip Small	Main Bar Joiner	90 Degree Bracket	Roll in Clip Large	ALSDL: Long grub screw-driver ALSDS: Small grub screw-driver	Suspension Clips
Application of Accessory Item	Connects all sections with all wall angles and Perimeter Trims / Pelmet	Connects all Main Bars: 45 and 50mm sections *M/R Joiner for Two Way System is BP9338	Used with all Main Bars 45 and 50mm sections	For connecting Main Bars or Cross Runners to Perimeter Trims	For use with Grub screw Roll in Clip	For use on all Main Bars and Perimeter Trims

AXIOM PELMET SYSTEMS



3-Sided Pelmet with slotted Air Diffuser Face Plate – Modular Grid and Ultima panel — Woolworths HQ, Sydney


Transition in style

Regain aesthetic control of the perimeter with an Armstrong® Axiom Pelmet Systems. The transition from pelmet to either plasterboard margin or acoustic ceiling is now simple. Armstrong® Axiom Pelmet Systems are a pre-engineered solution, integrating curtain pelmets, air distribution and ceiling elevation changes. Field fabrication and on-site decisions become a thing of the past. Armstrong® Axiom Pelmet Systems directly integrate with the ceiling grid via a positive locking connection clip. Concealed splice plates enable mechanical lock connections between adjacent pelmet sections.

Three easy Profiles

There are three basic aluminum extrusion profiles that provide a precise, crisp architectural detail.


1





2-Sided Pelmet with transition to Acoustical/Drywall Grid

Single piece aluminium extrusion that forms a simple 2 sided pelmet. Transition to either acoustical grid or set plaster margin.

2




3-Sided Pelmet with transition to Acoustical/Drywall Grid



Pelmet with Extension

Pre-engineered aluminium 3 sided pelmets can be produced from one or two piece sections enabling flexibility in size of pelmet. Extension components allow for additional design flexibility and ceiling elevation changes. Transition to either acoustical grid or set plaster margin.

3

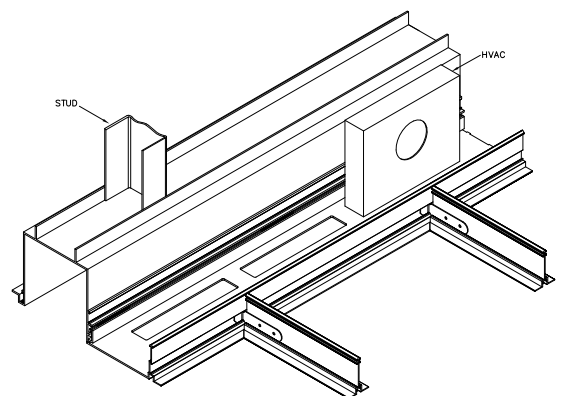

3-Sided Perimeter Pelmet with Diffuser Face Plate and transition to "Blue Tongue" Grid

Pelmets can be designed for full integration with air distribution at the perimeter. Diffuser face plate is pre-slotted according to air supply specifications. Transition to either acoustical grid or set plaster margin.

AXIOM PELMET SYSTEMS




3-Sided Pelmet with Air Diffuser Face Plate



Two Piece Pelmet with Margin

Accessories for Axiom Pelmet Sections


Component Specifications



Item	Design
ALMRJS	Joiner for Pelmet



Single Piece Pelmet

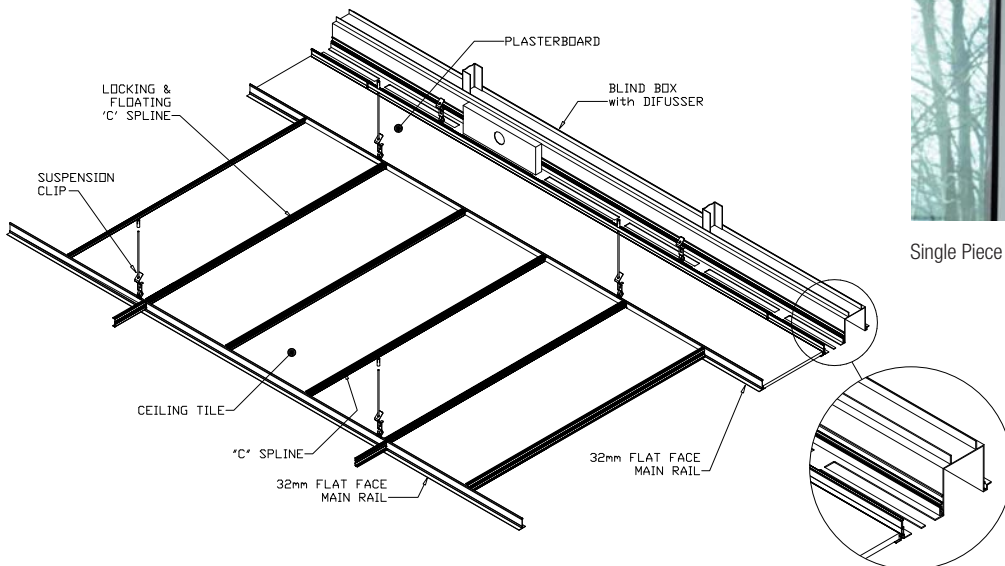

One Way System with Composite Pelmet

Armstrong World Industries, the Global Leader in Acoustic Ceilings

NSW

Armstrong World Industries Pty. Ltd.
99 Derby Street, Silverwater NSW 2128
Telephone (02) 9748 1588 | Facsimile (02) 9748 8449

VIC/TAS

Armstrong World Industries Pty. Ltd.
Unit 1, 88 Henderson Road, Rowville VIC 3178
Telephone (03) 8706 4000 | Facsimile (03) 8706 4040

QLD/NT

Armstrong World Industries Pty. Ltd.
6 Barrinia Street, Slacks Creek QLD 4127
Telephone (07) 3809 5565 | Facsimile (07) 3809 5507

SA

Total Building Systems Pty. Ltd.
160 Grand Junction Road, Blair Athol SA 5084
Telephone (08) 7325 7555 | Facsimile (08) 7325 7566

WA

Ceiling Manufacturers of Australia Pty. Ltd.
5 Irvine Street, Bayswater WA 6053
Telephone (08) 9271 0777 | Facsimile (08) 9272 2801

New Zealand

Forman Building Systems Ltd.
PO Box 12349, Penrose, Auckland
Telephone 64-9-276 4000 | Facsimile 64-9-276 414

www.armstrongceilings.com.au

For
Seismic Design
support please
contact your local
Armstrong Ceilings
office.



Printed on Zanders Mega Recycled paper
©2016 Armstrong World Industries Pty Ltd.
AWP0416

Inspiring Great Spaces™

Armstrong[®]
CEILING SOLUTIONS